


## WQFN44-32


**Package Code: UAT**

WQFN44-32 (4.00mm x 4.00mm x 0.75mm)

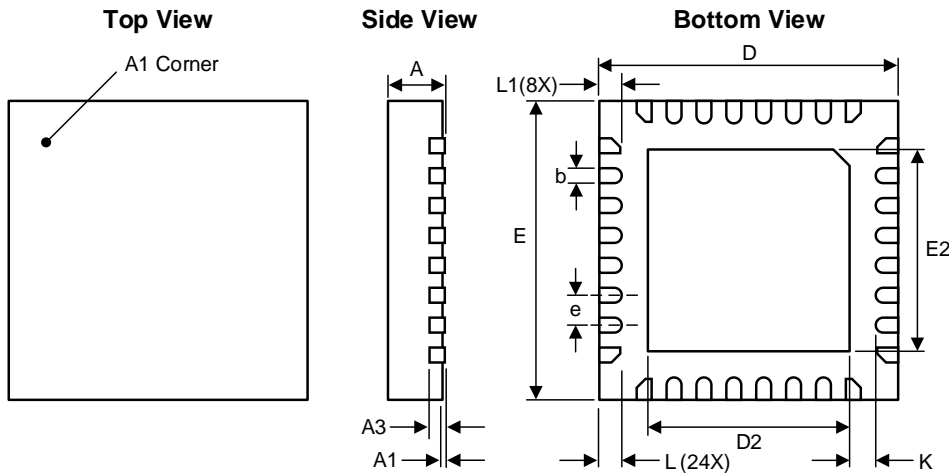

| Dimension | mm        |      |      |
|-----------|-----------|------|------|
|           | Min.      | Typ. | Max. |
| A         | 0.70      | 0.75 | 0.80 |
| A1        | 0.00      | 0.02 | 0.05 |
| A3        | 0.203 REF |      |      |
| b         | 0.15      | 0.20 | 0.25 |
| D         | 3.90      | 4.00 | 4.10 |
| D2        | 2.65      | 2.70 | 2.75 |
| E         | 3.90      | 4.00 | 4.10 |
| E2        | 2.65      | 2.70 | 2.75 |
| e         | 0.40 BSC  |      |      |
| K         | 0.20      | -    | -    |
| L         | 0.25      | 0.30 | 0.35 |
| L1        | 0.33      | 0.28 | 0.33 |

### Recommended Footprint

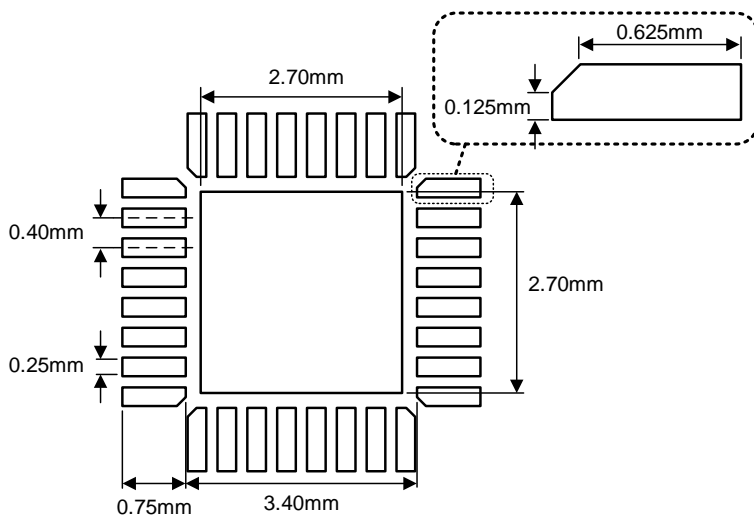

Kinetic Technologies cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Kinetic Technologies product. No intellectual property or circuit patent licenses are implied. Kinetic Technologies reserves the right to change the circuitry and specifications without notice at any time.