

13.5W Wireless Power Receiver

Features

- Single Chip Solution for 13.5W wireless power receiver
- WPC/Qi V-1.3 EPP Compliant for 9V_{DC} at 1.5A
- 95% Peak Efficiency LDO mode from Coil to 9V_{OUT}
- Full Synchronous Rectification with Low-R_{DS(ON)}
- LDO Mode or Pass-Through Mode configurable
 - ▶ 9V_{output} at up to 1.5A peak output current
 - ▶ Short-circuit and current limit protection
- Embedded Microcontroller and OTP/ROM Memory
- Configurable Foreign Object Detection (FOD)
- Standard Firmware with optional external resistor configuration of FOD operating parameters
- Device Enable control pin for extremely low power consumption while in disabled mode
- Proprietary, robust internal Over-Voltage Protection
 - ▶ Without any external “Sink” resistor or other devices
- Optional external NTC Over-Temperature Protection
- -40°C to 85°C operating temperature range
- 52-bump WLCSP 2.66 x 3.90mm (0.4mm pitch)

Brief Description

The KTE7001 is a single chip, 13.5W wireless power receiver that conforms to WPC/Qi V-1.3 Extended Power Profile (EPP) standard specifications for solutions requiring 9V_{DC} output voltage. A wireless power receiver provides regulated DC output power derived from AC power that is magnetically coupled into a connected wireless power receiver coil.


The KTE7001 integrates a full synchronous rectifier and LDO to efficiently convert the wireless AC power into 9V_{DC} output at up to 1.5A current. The embedded microcontroller with firmware and OTP/ROM memory provides system monitoring, protection, and communications back to the power transmitter.

The KTE7001 is packaged in an advanced, fully “green” compliant, 2.66mm x 3.90mm, 52-bump Wafer-Level Chip-Scale Package (6x9 WLCSP).

Applications

- Mobile Internet Devices, IoT, Accessories
- Battery Powered Medical, Industrial, Consumer
- Wireless Headsets, Headphones, Earbuds

Typical Application

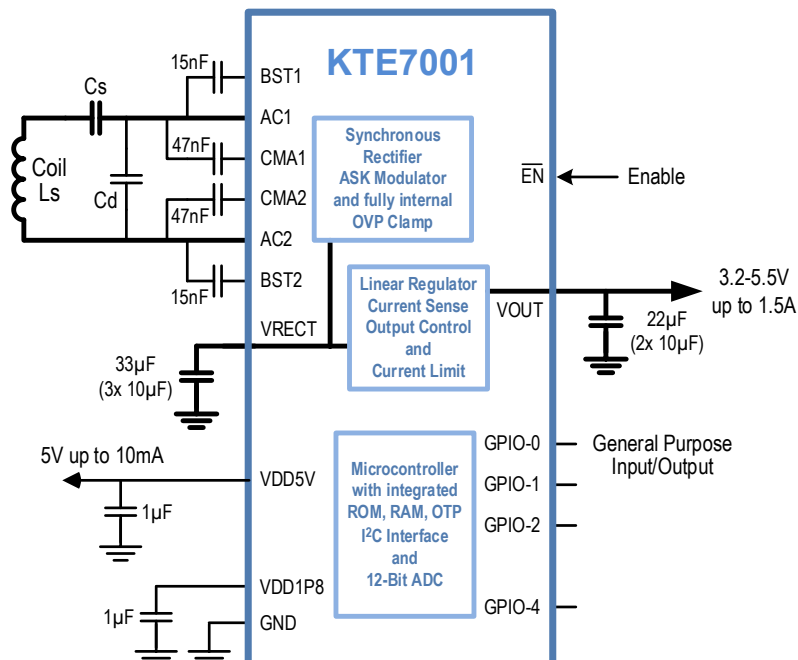


Pin Descriptions

Pin #	Name	Function
G2, H1, H2	AC1	AC Power Input 1 – input to synchronous rectifier. Connect to power input resonant LC tank.
G5, H5, H6	AC2	AC Power Input 2 – input to synchronous rectifier. Connect to power input resonant LC tank.
E1, E2, E5, E6, F2, F3, F4, F5	VRECT	Rectifier DC Output Voltage and LDO Input – connect external bypass/bulk capacitors from these pins to the ground plane using multiple vias.
D1, D2, D3, D4, D5, D6	VOUT	LDO Output Voltage – connect external bypass/bulk capacitors from these pins to the ground plane using multiple vias. Supports 5V output into loads up to 1.5A.
F1	VDD5V	Internal 5V LDO Bias – connect an external 1 μ F bypass capacitor from this pin to the ground plane using an unshared via. Supports 5V loads up to 10mA.
F6	VDD1P8	Internal 1.8V LDO Bias – connect an external 1 μ F bypass capacitor from this pin to the ground plane using an unshared via.
G1	BST1	Bootstrap 1 – gate driver charge pump for internal synchronous rectifier AC1 high-side MOSFET. Connect a 15nF capacitor from this pin to AC1.
G6	BST2	Bootstrap 2 – gate driver charge pump for internal synchronous rectifier AC2 high-side MOSFET. Connect a 15nF capacitor from this pin to AC2.
A1	CMA1	Communication Load Capacitance for AC1 – connect a capacitor from this pin to AC1. Capacitor value is typically 22nF-47nF and should be optimized for the application.
A6	CMA2	Communication Load Capacitance for AC2 – connect a capacitor from this pin to AC2. Capacitor value is typically 22nF-47nF and should be optimized for the application.
B1	CMB1	Optional Communication Load Capacitance for AC1 – normally not connected; leave floating.
B6	CMB2	Optional Communication Load Capacitance for AC2 – normally not connected; leave floating.
B5	$\overline{\text{EN}}$	Active-Low Enable Input – connect to ground or logic 0 to enable the IC.
A3, B3, B4, C3	NC	Do not connect. Leave pin floating
A4, A5, C4, H4	GPIO-n	General Purpose Input/Outputs – optional configuration pins for NTC, FOD gain and offset, and LDO vs. Pass-Through mode. Leave floating (N.C.) for default configuration.
C2	SINK	High voltage clamp - internally connected to VRECT. The preferred configuration is to connect this pin externally to VRECT. For simplified layout, leave as floating (no connect).
A2, B2, C5, G3, G4, H3	RSVDn	Reserved – not used in the application; connect to ground.
J1, J2, J3, J4, J5, J6	PGND	Power Ground – connect to the ground plane using multiple vias.
C1, C6	AGND	Analog Ground – connect to the ground plane using unshared vias.

Pinout Diagram

WLCSP69-52

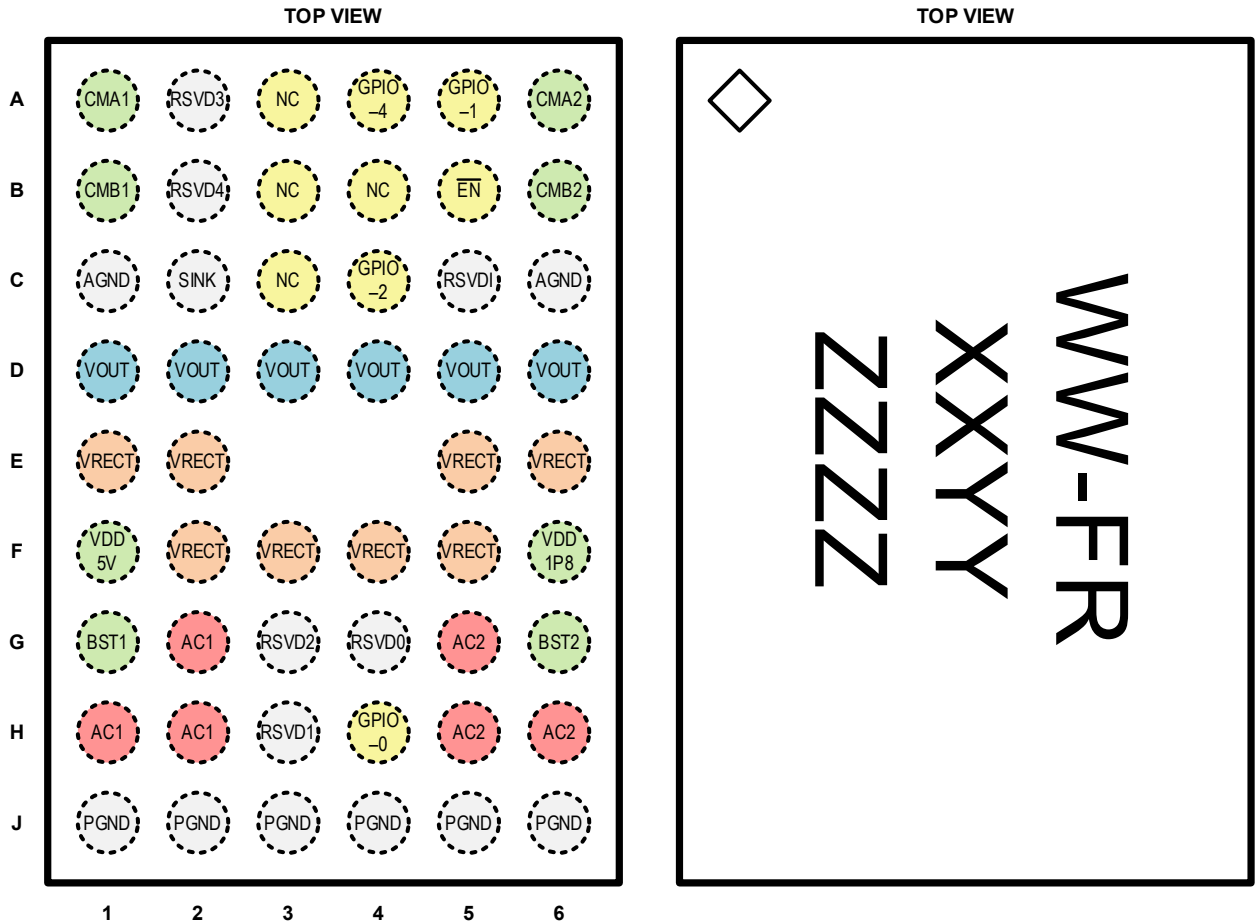

52-bump 2.66mm X 3.90mm X 0.620mm
WLCSP, P = 0.4mm

Top Mark

WW = Device ID, FR = Firmware Code
XX = Date Code, YY = Assembly Code
ZZZZ = Serial Number

Absolute Maximum Ratings¹

Symbol	Description	Value	Units
V _{AC}	AC1, AC2 to PGND	-0.3 to 26	V
V _{RECT}	VRECT to PGND	-0.3 to 26	V
V _{RECT-AC}	VRECT to AC1, VRECT to AC2	-0.3 to 26	V
V _{SINK}	SINK to PGND	-0.3 to 26	V
V _{PGND-AGND}	PGND to AGND	-0.3 to 0.3	V
V _{OUT}	VOUT to AGND	-0.3 to 26	V
V _{RECT-OUT}	VRECT to VOUT	-0.3 to 26	V
V _{BST}	BST1, BST2 to AGND	-0.3 to 26	V
V _{BST-AC}	BST1 to AC1, BST2 to AC2	-0.3 to 6	V
V _{CM}	CMA1, CMA2, CMB1, CMB2 to AGND	-0.3 to 26	V
V _{DD5V}	VDD5V to AGND	-0.3 to 6	V
V _{DD1P8}	VDD1P8 to AGND	-0.3 to 2	V
V _{EN}	EN to AGND	-0.3 to 28	V
V _{GPIO}	GPIO-0, GPIO-1, GPIO-2, GPIO-3, GPIO-4 to AGND	-0.3 to V _{DD5V} +0.3	V
V _{RSVD}	RSVD0, RSVD1, RSVD2, RSVD3, RSVD4, RSVDI to AGND	-0.3 to V _{DD5V} +0.3	V
I _{AC}	AC1, AC2 Current	2.6	A
I _{OUT}	VOUT Current	2.6	A
T _J	Operating Junction Temperature Range	-40 to 125	°C
T _S	Storage Temperature Range	-55 to 150	°C
T _{LEAD}	Maximum Soldering Temperature (at leads, 10 sec)	260	°C

ESD Ratings²

Symbol	Description	Value	Units
V _{ESD_HBM}	JEDEC JS-001-2017 Human Body Model (all pins)	±2	kV

Thermal Capabilities³

Symbol	Description	Value	Units
Θ _{JA}	Thermal Resistance – Junction to Ambient	47	°C/W
Θ _{JB}	Thermal Resistance – Junction to Board	4.38	°C/W
P _D	Maximum Continuous Power Dissipation at 25°C (T _J = 125°C)	2.13	W
ΔP _D /ΔT	Derating Factor Above T _A = 25°C	-21.3	mW/°C

1. Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation at conditions other than the operating conditions specified is not implied. Only one Absolute Maximum rating should be applied at any one time.
2. ESD Ratings conform to JEDEC industry standards. Some pins may actually have higher performance.
3. Junction to Ambient thermal resistance is highly dependent on PCB layout. Values are based on thermal properties of the device when soldered to an EV board.

Recommended Operating Conditions

Symbol	Description	Value	Units
C _{DD5V}	VDD5V Capacitor	1	μF
C _{DD1P8}	VDD1P8 Capacitor	1	μF
C _{RECT}	VRECT Capacitor(s) (≥25V rating)	3x10 or 1x33	μF
C _{OUT}	VOUT Capacitor(s)	2x10 or 1x22	μF
	VOUT Effective Capacitance (at 5V DC bias)	>8	μF
I _{OUT}	VOUT Current	0 to 1.5	A
I _{VDD5V}	VDD5V Current (output available for application circuit)	0 to 10	mA
T _A	Ambient Operating Temperature Range	-40 to 85	°C
T _J	Die Operating Temperature Range	-40 to 125	°C

Ordering Information

Part Number	Marking ⁴	Operating Temperature	Package
KTE7001ENAA-DA-TB ⁵	RFFRXXYYZZZZ	-40°C to +85°C	WLCSP69-52

4. RF = Device ID, FR = Firmware Code, XX = Date Code, YY = Assembly Code, ZZZZ = Serial Number.

5. Firmware code is included in the ordering part number. Please contact Kinetic Sales for further details.

Electrical Characteristics⁶

Unless otherwise noted, the *Min* and *Max* specs are over the full operating temperature range of -40°C to +85°C. Typical values are specified at T_A = +25°C.

Symbol	Description	Conditions	Min	Typ	Max	Units
Supply Specifications						
V _{UVLO}	VRECT Under-Voltage Lockout	VRECT rising threshold		3.06	3.2 ⁷	V
		Hysteresis		150		mV
I _{RECT}	VRECT Quiescent Current	EN = 0, VRECT = 7V		4.5		mA
I _{SHDN}	VRECT Shutdown Current	EN = 1, VRECT = 7V		18		μA
V _{DD5V}	VDD5V Output Voltage	I _{LOAD} ≤ 10mA	4.5	5	5.5	V
V _{DD1P8}	VDD1P8 Output Voltage	No external load	1.62	1.8	1.98	V
Thermal Shutdown Specifications						
T _{J_SHDN}	IC Junction Thermal Shutdown	T _J rising threshold		140		°C
		Hysteresis		20		°C
Logic Pin Specifications (EN, INT, GPIO-n)						
V _{IH}	Input Logic High (EN)		1.4			V
V _{IL}	Input Logic Low (EN)				0.3	V
I _{I_LK}	Input Logic Leakage (EN)	T _A = 25°C, V _I = 0V or 5V	-1		1	μA
I _{O_SRC}	Output I _{SOURCE} (GPIO-0)		19.80	20	20.20	μA
I _{O_SRC}	Output I _{SOURCE} (GPIO-1,2,4)		19.65	20	20.35	μA
Synchronous Rectifier Specifications						
R _{DS_SW}	Rectifier Switch Drain-Source On-Resistance	I _{SW} = 0.5A		40		mΩ
CMA1, CMA2, CMB1, CMB2, SINK Specifications						
R _{ON_CM}	CMxx On Resistance	I _{CMxx} = 200mA		1		Ω
I _{CM_LK}	CMxx Leakage Current	V _{CMxx} = 20V		1		μA
I _{SINK_LK}	SINK Leakage Current	V _{SINK} = 20V		1		μA

6. Device is guaranteed to meet performance specifications over the -40°C to +85°C operating temperature range by design, characterization and correlation with statistical process controls.

7. Value is guaranteed only at room temperature.

Electrical Characteristics (continued)⁶


Unless otherwise noted, the *Min* and *Max* specs are over the full operating temperature range of -40°C to +85°C. Typical values are specified at $T_A = +25^\circ\text{C}$.

Symbol	Description	Conditions	Min	Typ	Max	Units
VOUT LDO Specifications						
V_{OUT}	Output 9V Mode	$V_{RECT} = 9.30\text{V}$	8.85	9.00	9.15	V
V_{OUT_LDR}	VOUT Load Regulation	LDO Output Voltage		12		mV/A
V_{OUT_LNR}	VOUT Line Regulation	LDO Output Voltage		4		mV/V
I_{OUT_PEAK}	Peak Current Capability		1.50			A
$V_{RECT-OUT}$	VRECT to VOUT Dropout Voltage	$I_{OUT} = 1\text{A}$; V_{RECT} droops 10% below the LDO regulated output value		50	100	mV
V_{OUT_OV}	Overvoltage Threshold	Rising		15		%
		Falling		10		
I_{OUT_OVSINK}	Overvoltage Sink Current	V_{OUT} greater than V_{OUT_OV} threshold		10		mA


Typical Characteristics 9Vdc VOUT

Unless otherwise noted, $V_{OUT} = 9V$, $T_A = 25^\circ C$.


Efficiency (Coil to V_{OUT}) vs. Load

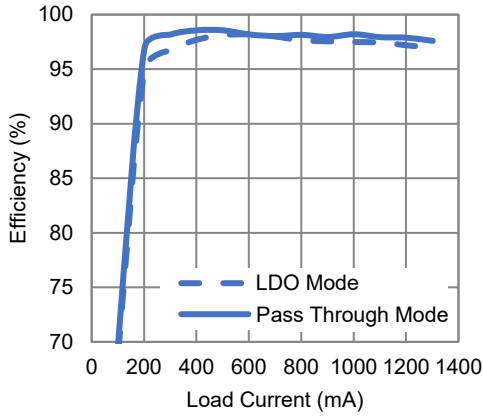

V_{OUT} vs. Load

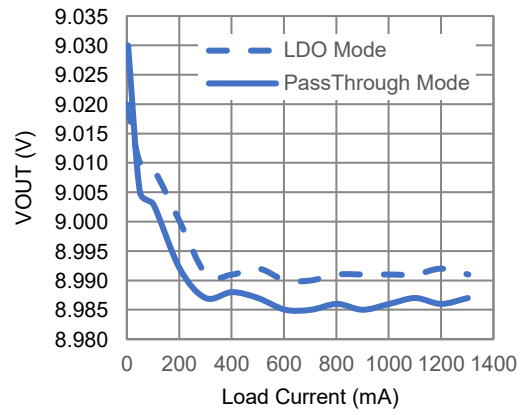

VRECT Profile vs. Load

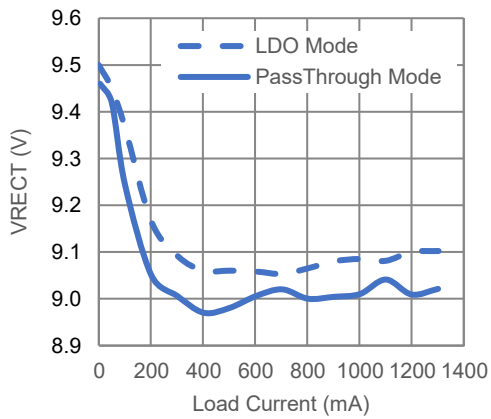

Detailed Application Schematic

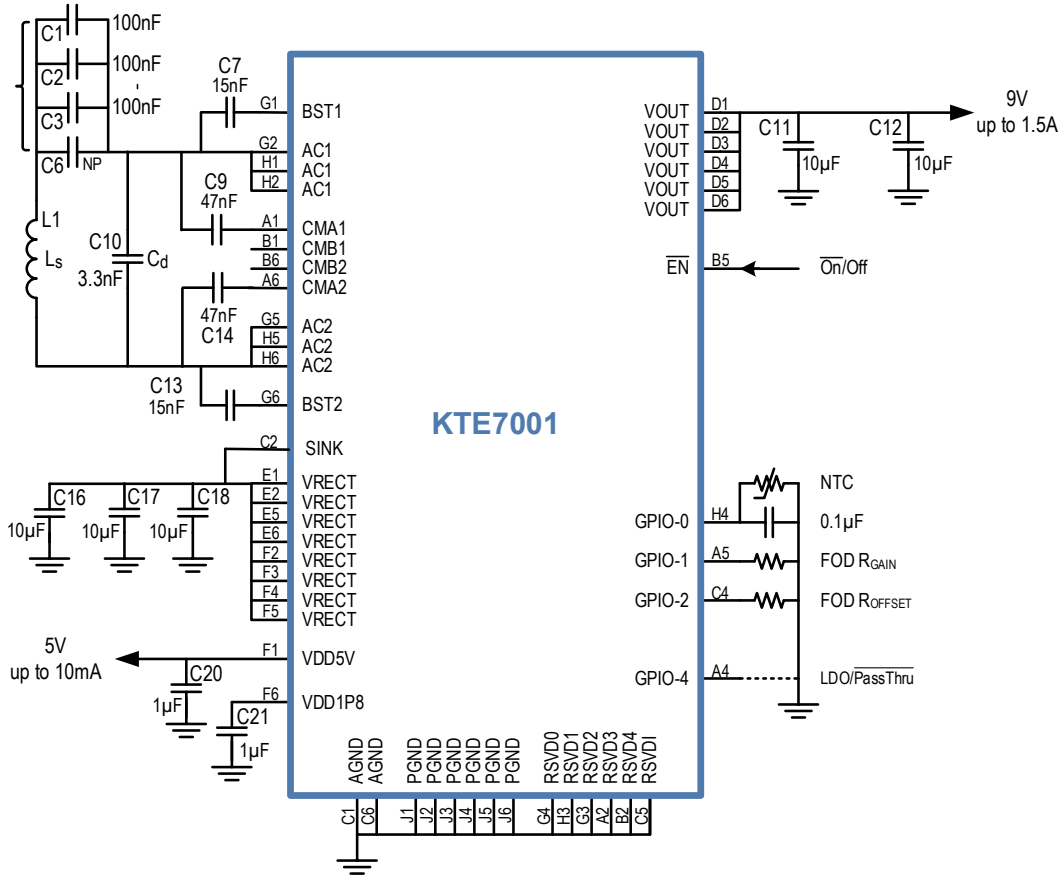


Figure 1. Detailed Application Schematic

BOM

Item	Quantity	Reference	Description	Value	Manufacturer
1	4	C1, C2, C3	CAP CER 0.1µF 50V X7R	100nF	Murata
2	2	C7, C13	CAP CER 0.015µF 25V X7R	15nF	Yageo
3	1	C10	CAP CER 3300PF 50V X7R	3.3nF	Yageo
4	2	C9, C14 ⁸	CAP CER 47nF 50V X7R	47nF	Murata
5	3	C16, C17, C18 ⁹	CAP CER 10µF 25V X5R	10µF	Murata
6	2	C11, C12 ^{9, 10}	CAP CER 10µF 16V, 10V, 6.3V X5R	10µF	Murata
7	2	C20, C21	CAP CER 1µF 10V X5R	1µF	Yageo
8	1	U1	Wireless charger receiver	KTE7001	Kinetic Technologies
9	1	RX COIL	WPC receiver coil, ACR = 0.22Ω p/n ASC-504060E00-S00	8.2µH	Amotech

- The optimum capacitor value depends strongly on the electro-mechanical properties of the receiver coil and target operating range. The traditional 47nF value is larger than needed for most applications, and newer designs are typically using 33nF or 22nF.
- For low-cost applications and where device height is not critical, multiple devices may be replaced by single devices or fewer devices of equivalent total value. For large capacitor values, electrolytic capacitors may be used with a 0.1µF ceramic capacitor in parallel.
- Choose a voltage rating appropriate for the application output voltage requirements.

Functional Description

The KTE7001 is a single chip 13.5W wireless power receiver suitable for proprietary operation with wireless power transmitters similar to type A11, A10, A6, or A19 that are capable of supporting the desired output voltage and power. Transmitter and receiver coil topology and design should be optimized for the desired application scenario. This wireless power receiver provides regulated DC output power derived from AC power that is magnetically coupled into the wireless power receiver coil.

The KTE7001 integrates a full-synchronous rectifier and an LDO to efficiently convert the wireless AC power into up to 9V DC power at up to 1.5A. An embedded microcontroller with ROM and OTP memory provides power management, protection, and communications with the power transmitter.

Full-Bridge Synchronous Rectifier

The KTE7001 includes a full-bridge synchronous rectifier comprised of four low- $R_{DS(on)}$ MOSFET switches for high-efficiency AC-to-DC power conversion. The AC input to the rectifier is at pins AC1 and AC2, while the unregulated DC output is from pins VRECT to PGND. The rectified DC voltage and energy are stored in off-chip bulk capacitors connected to the VRECT pin.

Proprietary Overvoltage Protection

Fully internal proprietary overvoltage protection actively prevents damage to the KTE7001 from transient overvoltage events. This includes various possible application scenarios, including “jiggle” events that can occur when dynamically moving the receiver coil in relation to the transmitter surface. Conventional solutions typically rely upon external resistors and/or other devices to dissipate excess energy in attempts to prevent overvoltage damage. External devices are often physically too small to safely manage overvoltage without damage. The KTE7001 utilizes proprietary overvoltage protection that is more robust and does not require any external components.

LDO Mode

The KTE7001 integrates a high-power, low-dropout (LDO) linear regulator that provides a stable and accurate DC output for system loads up to 1.5A.

The LDO input is internally connected to the rectifier's output at VRECT, and the regulated output voltage is available at VOUT. Communications from the KTE7001 with the WPC transmitter automatically adjusts the transmitter's output power such that the KTE7001's rectifier output maintains the proper headroom for optimum operation of the LDO.

The LDO Mode is appropriate for applications that require a tightly regulated system supply voltage. Select the default LDO Mode by leaving the GPIO-4 pin floating (no connect) or tie this pin to VDD1P8.

Pass-Through Mode

The KTE7001 includes a Pass-Through Mode for the LDO. In the Pass-Through Mode, the LDO is set to the normal target regulator output voltage. However, the KTE7001 firmware communicates back to the WPC transmitter to maintain VRECT only slightly higher than the target VOUT voltage at higher power levels. This reduces the power dissipation normally associated with the voltage drop across an LDO necessary to maintain complete VOUT regulation at high output currents. At low output current, some headroom is maintained. This is necessary to prevent excessive VOUT drop caused by coil physics in the case when there is a sudden large increase in the output load.

The Pass-Through Mode is appropriate for battery charging or other applications that prioritize highest efficiency over output voltage accuracy. Select the Pass-Through Mode by connecting the GPIO-4 pin to ground.

Under-Voltage Protection

The KTE7001 includes under-voltage protection when VRECT falls approximately 3.5V. This temporarily disables the VOUT to give the system a chance to restore normal operation. This can avoid resetting the KTE7001 from undervoltage conditions. Resetting of KTE7001 will result in forced termination of the power transfer from the power transmitter.

Output Overvoltage Protection

The KTE7001 includes output overvoltage protection that applies a 10mA current sink to VOUT whenever the output voltage exceeds its nominal regulation set-point by more than 15%. The current sink is disabled when the output voltage returns to within 10% above nominal. This quickly reduces the VOUT voltage to normal after any VOUT increase that may occur when there is a sudden decrease in the VOUT load current.

Embedded Microcontroller and OTP Memory

The KTE7001 includes an embedded microcontroller with one-time programmable (OTP) memory configured with firmware that supports interoperation with transmitters similar to commonly available type A11, A6, A10, or A19.

Optional $\overline{\text{EN}}$ Input

The KTE7001 has an optional $\overline{\text{EN}}$ logic input pin to enable and disable the IC into a low power state. Connect the $\overline{\text{EN}}$ pin to ground to allow the device to function whenever there is sufficient VRECT for operation. In applications where it is useful to enable/disable the device, drive the $\overline{\text{EN}}$ pin with an appropriate voltage for the disabled state.

GPIO Pins and Optional Configuration

The KTE7001 has five GPIO pins, GPIO-0 through GPIO-4, which are used for optional input/output features and for option configuration. The configurable adjustments include NTC over-temperature protection (GPIO-0), FOD gain (GPIO-1), FOD offset (GPIO-2), and LDO Mode vs. Pass-Through Mode (GPIO-4).

Each GPIO may be optionally configured to have connected a 20 μ A high precision current source. Depending upon the application needs, this pin may be left floating (no connect), shorted to ground, or connected to an external configuration resistor. The voltage on the pin is measured by the integrated ADC and interpreted by firmware. See the *Applications Information* section in this datasheet for details regarding selecting optional resistor values.

Optional NTC Over-Temperature Protection

Pin GPIO-0 is configured to bias and measure an external negative temperature coefficient (NTC) thermistor. Typically, this feature is used to detect over-temperature near the receiver coil and transmitter coil interface.

The KTE7001 sends an End Power packet with the condition code “over temperature” when the voltage on GPIO-0 is less than 405mV, corresponding to a high temperature condition. Qi transmitters are required to shut off immediately upon receiving this code. Generally, all Qi transmitters will shut down for a long period of time to allow the receiver to cool down before attempting to restart the power transfer.

The GPIO-0 pin sources 20 μ A, which is converted to a temperature-dependent voltage by the thermistor. In applications with over-temperature protection, normally select an NTC thermistor with $R_{25^{\circ}\text{C}} = 47\text{k}\Omega$ and $\beta = 4050$ to disable wireless power when the NTC temperature exceeds 50 $^{\circ}\text{C}$. The temperature threshold may be adjusted via NTC selection and even adding additional normal resistors around the NTC. See the *Applications Information* section in this datasheet for details on selecting the thermistor.

If not using the NTC, leave the GPIO-0 pin floating (not connected to anything).

Optional I²C Interface and $\overline{\text{INT}}$ Flag

The KTE7001 includes an optional I²C serial interface and an open-drain interrupt flag. These interfaces may be used with Kinetic engineering development tools, and also, to support additional new functionality implemented by future versions of KTE7001 firmware.

Optional FOD Gain and Offset Adjustment

FOD is an acronym for “Foreign Object Detection”. FOD is a mandatory safety feature required by the WPC specifications. The purpose of FOD is to prevent possibly dangerous heating of metal objects (‘foreign’ objects). Such heating can result from objects having exposure to the magnetic charging field from the wireless power transmitter. It is a requirement for the wireless power receiver to accurately report the received power as packet data sent to the transmitter. The transmitter compares the reported received power to the amount of power being transmitted. If too much power is being lost, the transmitter may stop delivering power for reason of power lost into a possible foreign object.

The Kinetic EVB (Evaluation Board) is highly efficient, having a very high-quality coil and being constructed without any “friendly” metals in the magnetic charging field area. The EVB power measurement and FOD related parameters are very accurately calibrated and do not need any adjustment. However, a final application configuration may have

a different receiver coil or may have metal components (screws, frame, battery, PCB wiring, etc.) nearby the receiver coil. Such “friendly” metal will increase the power lost in the wireless power receiver system. These power loss differences must be compensated so that the amount of power reported by the receiver in the Received Power Packet (RPP) is accurate and within WPC specification requirements.

The KTE7001 includes optional resistor adjustments for Foreign Object Detection (FOD) Gain and Offset to allow proper calibration across varying applications. Typically, real product applications will have losses that are greater than the losses that exist in the calibrated EVB. For this reason, most of the adjustment range is a positive value. For losses that are proportional to the power level, the FOD Gain can be adjusted. For losses that are a constant amount regardless of the power level, the FOD Offset value can be adjusted. Both of these adjustments affect the value contained in the RPP packet that is communicated to the power transmitter.

To adjust FOD Gain and FOD Offset, external resistors can be attached to KTE7001 GPIO pins to make the required change. For details about this adjustment, refer to the *Optional FOD R_{GAIN} Selection* and *Optional FOD R_{OFFSET} Selection* sections within the *Applications Information* of this datasheet. If the default Gain and/or Offset values can be used without any change, then leave the respective GPIO pin floating (not connected to anything).

Applications Information

Coil Selection

Select a coil that meets the needs of the application. Consider form-factor, series resistance and inductance. Larger diameter coils generally perform better. The coil should include a low-loss magnetic shielding material that is sufficient to prevent magnetic flux from interacting with metallic objects behind the coil or very close to the coil windings. To obtain WPC/Qi certification, the receiver must work with all WPC/Qi certified transmitters.

Capacitor Selection

Ceramic capacitors with X5R, X6S, or X7R ratings are recommended due to their low ESR, low ESL, low temperature coefficients, and small physical sizes. Consider the voltage rating, size, and DC bias derating characteristic of the capacitor.

C_s and C_d Capacitor Selection

Choose C_s and C_d per the guidelines set forth by the WPC/Qi V-1.3 BPP specifications. Use small ceramic capacitors with 50V or more rating.

Select the value of C_s for primary resonance at 100kHz:

$$f_s = \frac{1}{2\pi\sqrt{L'_s C_s}} = 100kHz$$

where L'_s is the self-inductance of the coil when placed and aligned on the interface surface of a power transmitter.

Select the value of C_d for secondary resonance at 1MHz:

$$f_d = \frac{1}{2\pi\sqrt{L_s \left(\frac{1}{C_s} + \frac{1}{C_d}\right)^{-1}}} = 1MHz$$

where L_s is the self-inductance of the coil when away from the interface surface of a power transmitter but including any "friendly" magnetic material that is part of the receiver design.

C_{BSTn} Capacitor Selection

Choose ceramic boost capacitors with voltage rating of 50V and 15nF nominal capacitance. Typically, 0402 (1005M) case-size is sufficient.

C_{CMA_n} Capacitor Selection

Choose ceramic modulation capacitors with voltage rating of 50V and 47nF nominal capacitance. Typically, 0402 (1005M) case-size is sufficient.

C_{RECT} Capacitor Selection

Choose ceramic rectifier output capacitor(s) with voltage rating of 25V or more and 30μF total nominal capacitance or more. Typically, three 10μF capacitors in parallel, each with 0603 (1608M) case-size or larger, is a good choice. Larger values and larger case-size provide more effective capacitance when considering the DC bias derating characteristic of the capacitor. If a low-cost electrolytic type capacitor is used, an additional 0.1μF capacitor should be placed in parallel with the electrolytic capacitor.

C_{OUT} Capacitor Selection

Choose ceramic LDO output capacitor(s) with voltage rating appropriate for the selected application maximum output voltage, and with 20μF total nominal capacitance or more. Typically, two 10μF capacitors in parallel, each with 0603 (1608M) case-size or larger, is a good choice. Larger values and larger case-size provide more effective capacitance when considering the DC bias derating characteristic of the capacitor. The LDO requires a minimum of 8μF *effective* output capacitance. If a low-cost electrolytic type capacitor is used, an additional 0.1μF capacitor should be placed in parallel with the electrolytic capacitor.

C_{VDD5V} and C_{VDD1P8} Capacitor Selection

Choose ceramic VDD5V and VDD1P8 output capacitors with voltage rating of 6.3V or more and 1µF nominal capacitance each. Typically, 0402 (1005M) case-size is sufficient.

C_{NTC} Capacitor Selection

When using the optional NTC thermistor, place a 0.1µF ceramic bypass capacitor from GPIO-0 to ground, local to the IC, in order to reject noise. If not using the NTC, leave the GPIO-0 pin floating (no connect).

Optional NTC Thermistor Selection

The KTE7001 is optimized for an NTC thermistor.

The GPIO-0 pin is configured as a 20µA current source to bias the NTC. As temperature increases, the thermistor resistance reduces, causing the voltage at GPIO-0 to also reduce. An over-temperature condition will occur when the NTC resistance becomes lower than needed to keep the voltage on GPIO-0 higher than the 405mV threshold.

To increase the over-temperature protection threshold, add resistance in series with the NTC and/or choose an appropriate different NTC device.

To decrease the over-temperature protection threshold, add resistance in parallel with the NTC and/or choose a different NTC.

If not using the NTC, leave the GPIO-0 pin floating (not connected to anything).

Optional FOD R_{GAIN} Selection

This adjustment changes the calculation of the total received power value that is communicated to the transmitter in the Received Power Packet (RPP). The nominal reported RPP value, will result in a margin of approximately 650mW greater than the transmitter effective transmitted power. Typically, a transmitter may shutdown for FOD reasons if there is more than this margin of power loss. This adjustment can be made using the following table values. Resistor tolerance must be 1% or better for guaranteed selection of the desired FOD gain value. Please note that the resistor value is measured only at the time of the initial power-on time of the receiver.

Table 1. FOD R_{GAIN} Selection

Noted: If both R_{GAIN} and R_{OFFSET} are less than 1k, FOD is disabled.

FOD R _{GAIN}	RPP Gain Change
R _{GAIN} and R _{OFFSET} <1k	+1.4W added to RPP
<1k	-4.7%
5k	-3.1%
10k	-1.6%
15k	+1.6%
20k	+3.1%
25k	+4.7%
30k	+6.3%
35k	+7.8%
40k	+9.3%
45k	+10.9%
50k	+12.5%
Floating (no connect)	0%

Optional FOD R_{OFFSET} Selection

This adjustment changes the calculation of the total received power value that is communicated to the transmitter in the Received Power Packet (RPP). The nominal reported RPP value, will result in a margin of approximately 650mW greater than the transmitter effective transmitted power. Typically, a transmitter may shutdown for FOD reasons if

there is more than this margin of power loss. This adjustment can be made using the following table values. Resistor tolerance must be 1% or better for guaranteed selection of the desired FOD offset value. Please note that the resistor value is measured only at the time of the initial power-on time of the receiver.

Table 2. FOD R_{OFFSET} Selection

Noted: If both R_{GAIN} and R_{OFFSET} are less than 1k, FOD is disabled.

FOD R _{OFFSET}	RPP Offset Change
R _{GAIN} and R _{OFFSET} <1k	+1.4W added to RPP
<1k	-117mW
5k	-78mW
10k	-39mW
15k	0
20k	+39mW
25k	+78mW
30k	+117mW
35k	+156mW
40k	+195mW
45k	+234mW
50k	+273mW
Floating (no connect)	0

Recommended PCB Layout

See Figure 2 for the recommended PCB layout. The drawing is to scale. Larger external components are 0603 (1608M) size, while smaller components are 0402 (1005M) size. It is possible to fit the entire solution in under 47mm². However, depending upon PCB design and assembly rules, the component-to-component minimum distance may need to be increased.


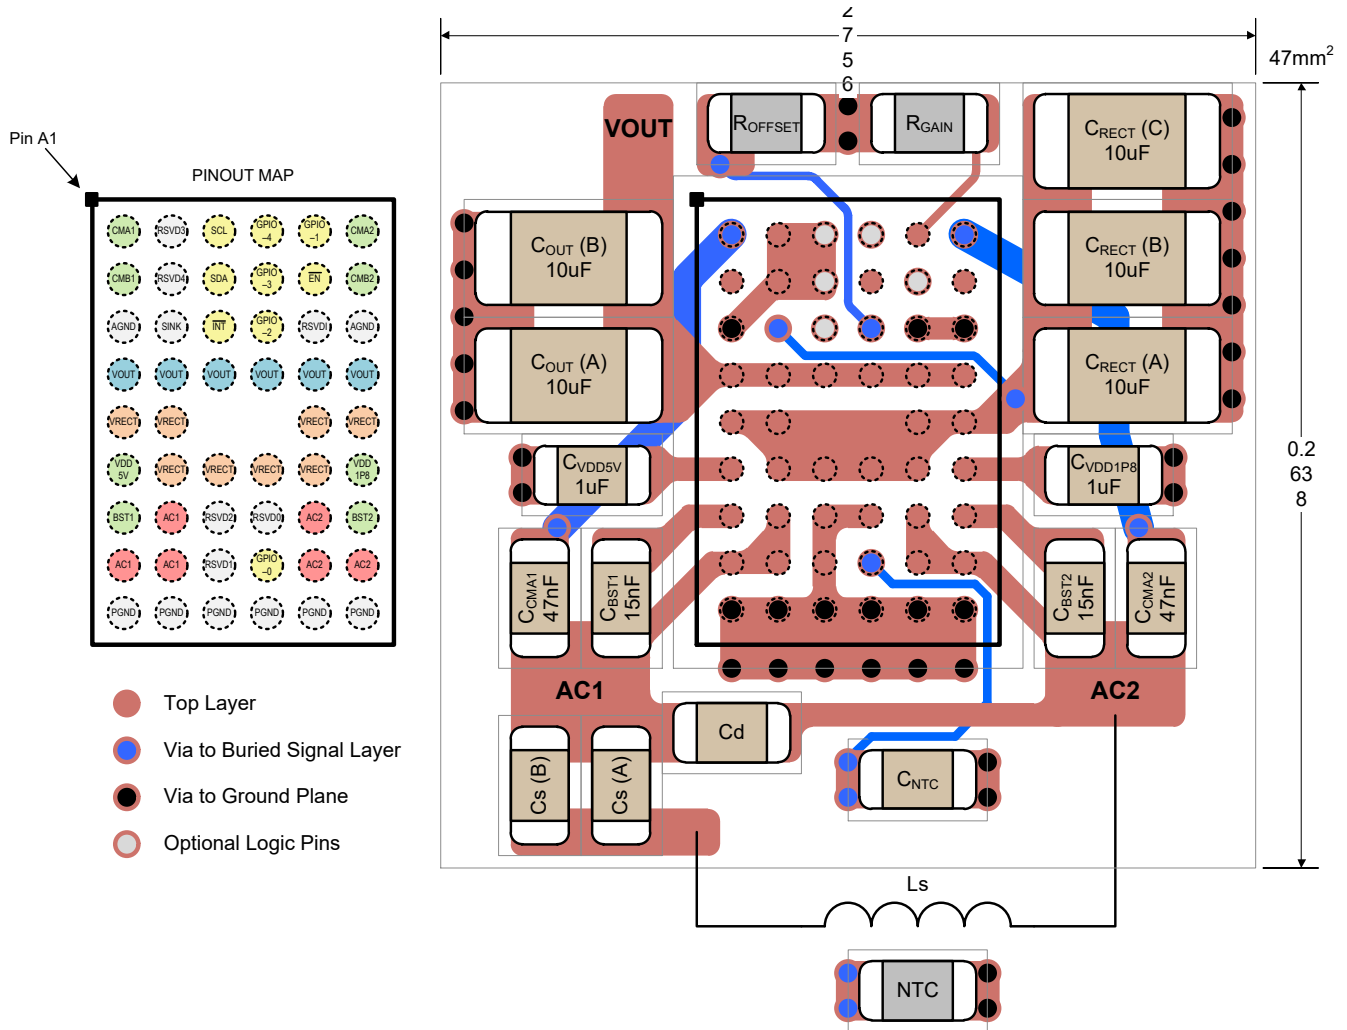



Figure 2. Recommended PCB Layout

Packaging Information

WLCSP69-52 (2.66mm x 3.90mm x 0.62mm)

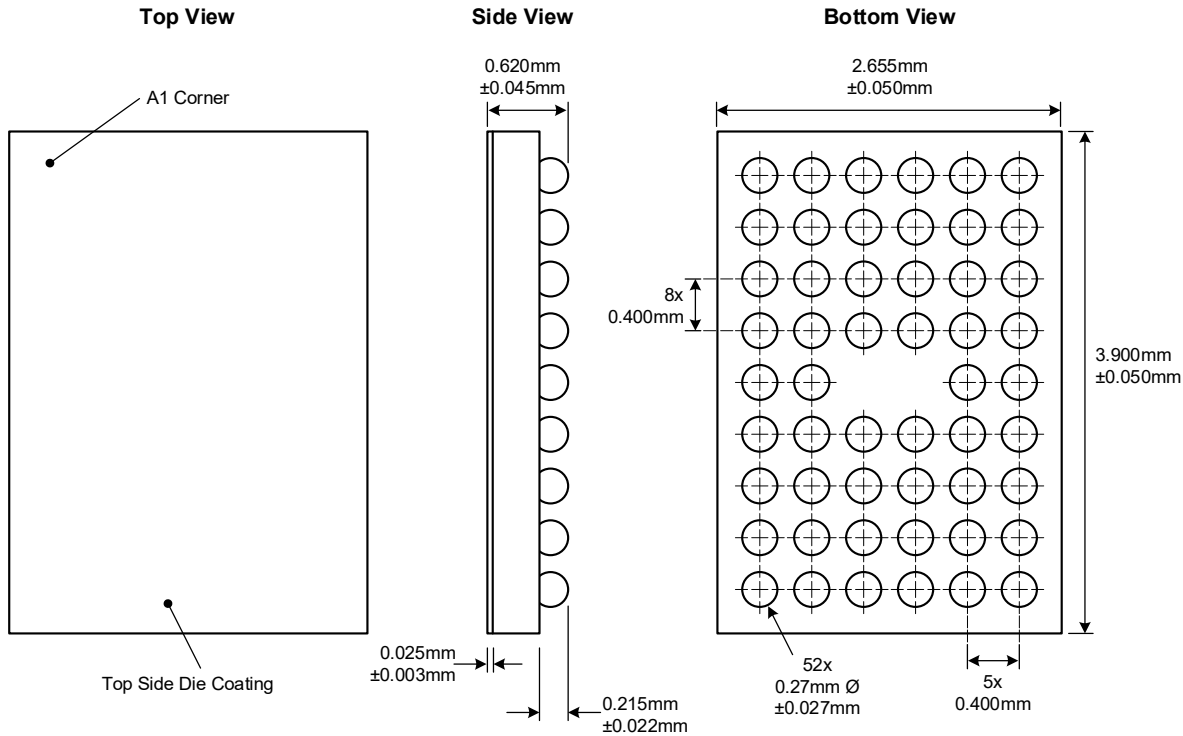

**Recommended Footprint
(NSMD Pad Type)**

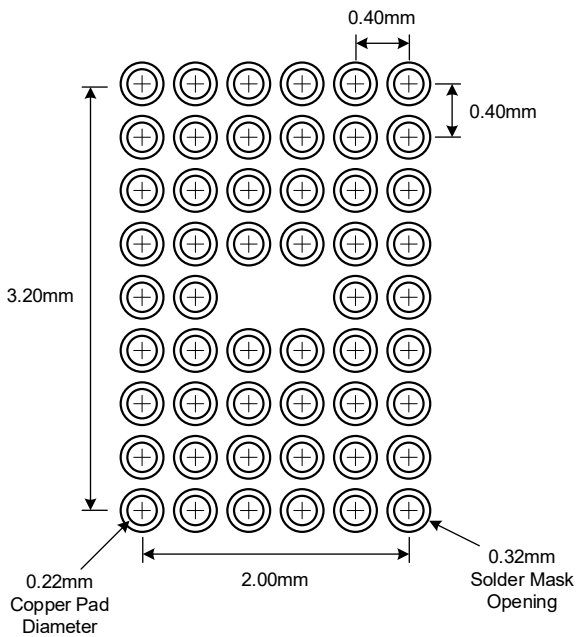

Kinetic Technologies cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Kinetic Technologies product. No intellectual property or circuit patent licenses are implied. Kinetic Technologies reserves the right to change the circuitry and specifications without notice at any time.